

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020724 A2

- (51) International Patent Classification⁷: **D04H 1/00**
- (21) International Application Number:
PCT/DK2003/000566
- (22) International Filing Date: 28 August 2003 (28.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2002 01259 28 August 2002 (28.08.2002) · DK
- (71) Applicant (for all designated States except US): **JM ENGINEERING A/S** [DK/DK]; Industrivej 15 A, DK-5592 Ejby (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MADSEN, Jørn, Møller** [DK/DK]; Lungeskovvej 1, DK-5591 Gelsted (DK).
- (74) Agent: **PATRADE A/S**; Fredens Torv 3A, DK-8000 Aarhus C (DK).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR MAKING FIBRE BALLS

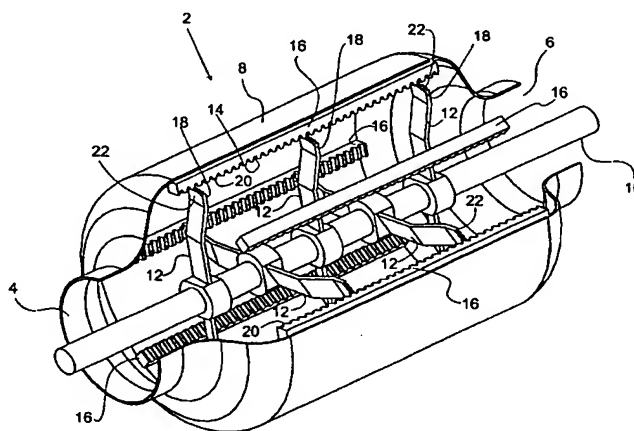

(57) Abstract: The present invention concerns an apparatus and a method for making fibre ball from a fibrous product, where the apparatus includes an inlet for fibrous products and an outlet for fibrous balls, where the apparatus includes a cylindric housing, where the apparatus includes a centrally disposed, through-going rotating shaft that is driven by a motor, where a number of radially outwards directed wings are secured to the shaft and are interacting with the internal wall of the cylindric housing. The purpose of the invention is to provide a simple and rapidly continually working machine for producing fibre balls from a fibrous product. This may be achieved with a machine as described in the introduction, if the cylindric housing at the inner wall includes at least one axially extending projection, where the projection of the inner wall interacts with the front edge of the outwards directed wings. Hereby may be achieved that fibre balls are formed in a very efficient way. Fibre products may continually be supplied to the inlet, and finished fibre balls may continually be delivered from the outlet of the machine. The machine is not critical with regard to the form of fibrous products with which it is supplied. Loose fibres may be used, but plates or lumps of cohering fibres may be supplied as the machine automatically performs a dividing.

1/ PRTS

10/525723

DT15 Rec'd PGT/PTO 28 FEB 2005

14027PCDK

2005-02-28/HP/PV

JM Engineering A/S

Apparatus and method for making fibre balls

The present invention concerns an apparatus for making fibre balls from a fibrous product, where the apparatus includes an inlet for fibrous products and an outlet for fibrous balls, where the apparatus includes a cylindric housing, where the apparatus includes a centrally disposed, through-going rotating shaft that is driven by a motor, where a number of radially outwards directed wings are secured to the shaft and are interacting with the internal wall of the cylindric housing, where the cylindric housing on the inner wall includes at least one axially extending projection, where the projection of the inner wall interacts with the front edge of the outwards projecting wings, where the axially extending projection is designed with radially and inwards directed teeth, and where the front edges of the outwards directed wings are designed with radially, outwards directed teeth.

From US 5,429,783 there is known an apparatus for making fibre balls from a fibre-containing material, the apparatus including a vertical, upright cylinder that contain a through-going shaft on which is secured a number of horizontal wings, where the wings are finished by axially oriented plates that across a spacing interact with the inner wall of the cylinder. The spacing between the axially oriented plates and the inner wall of the cylinder is fixed. Close to the top of the cylinder there is an air fan ensuring an air flow and thereby transport of fibres and fibre balls up through the cylinder.

US 4,618,531, US 4,783,364 and US 4,794,038 also describe apparatuses for making fibre balls that consist of a cylinder containing a rotating shaft to which a number of arms are fastened. The machine is batch producing, and during operation is used an external blower for closed circulation of fibre products through the machine until a batch is finished.

US 4,144,294 describes a machine for forming fibre balls consisting of a box that inside contains a half barrel-shaped, lower section, where inside the box and the barrel-shaped lower section a mill system is running, consisting of 4 wings, where combs are provided on the wing tips. These combs interact with distributed combs disposed inte-

riorly of the cylinder part, where between the movable combs and the fixed combs a close passage occurs, as the teeth of the combs project in between each other. Fibre balls are thus formed by the through-going passage.

5 However, it is a relatively slowly producing machine as the box can only be filled with fibres desired to be transformed into fibre balls through a small opening. Thus there are not shown particular apertures for neither intake of fibre material or output of finished fibre balls. The machine described hereinabove may nearly be termed a traditional, known carding machine. In a machine like this there is not seen anything like
10 means generating air transport through the machine.

The purpose of the invention is to provide a simple and rapid, continually working machine for producing fibre balls from a fibre product. This may be achieved with a machine like the one described in the introduction, where at least one of the radially
15 outwards directed wings is angularly displaced relative to the longitudinal axis of the wings for achieving an air flow through the apparatus.

Hereby may be achieved that fibre balls are formed in a very efficient way. Fibre products may continually be supplied to the inlet, and finished fibre balls may continually be delivered from the outlet of the machine. The machine is not critical with
20 regard to the form of the fibre products supplied to it. Loose fibres may be used, but plates or lumps of cohering fibres may be supplied, as the machine is automatically performing division into smaller lumps of fibres. The passage of the wings by the projections contributes to dividing larger lumps of fibres into lesser cohering lumps of
25 fibres that may be transformed to fibre balls.

The axially extending projections may be designed with radially, inwards directed teeth. Hereby, adhering of fibres to the edges of the teeth may be achieved, whereby transport through the machine is delayed, and further working of the fibre balls is ef-
30 fected.

The front edges of the outwards directed wings may be designed with radially outwards directed teeth. Hereby may be achieved that the front edges of the wings have a

number of edges contributing to a rotating movement of the fibres.

At least one of the outwards directed wings may advantageously be angularly displaced for achieving an air flow through the apparatus. Hereby may be achieved that the apparatus itself includes means for transporting fibres through the machine. At the same time, there may arise a rotating, advancing turbulent air flow through the machine, where the inwards directed projections further contribute to the forming of turbulence in the through-flowing air. The turbulent flow may contribute to the shaping of the fibre balls in that the turbulent flow may imply frequent contact between fibre balls and cylinder inner wall, the projections of the inner wall, and the rotating wings.

The edges of the outwards directed wings may be angularly displaced, whereby the radially outwards directed teeth may interact with a plurality of the radially, inwards directed teeth of the projections. Hereby may be achieved that the fibres are effectively loosened from both the inwards directed teeth of the projections and of the teeth of the wing front edges. Thus the capacity of the machine may be increased.

The outwards directed wings may advantageously be angularly displaced with different angles. Hereby may be achieved that the air flow through the machine becomes different, whereby further turbulence in the machine may be attained. By increasing the air speed from inlet to outlet, overfilling of the machine may be prevented as the transport capacity forward through the machine may be increased.

The inner wall of the cylindric housing may contain a number of axially extending projections that may be disposed with angular intervals on the cylindric inner wall. Hereby may be achieved that the rotating flow of air and fibres becomes further turbulent, and the capacity of the machine and the quality of the produced fibre balls are increased.

The invention may include a method for making fibre balls from a fibrous product in a machine that include a cylinder containing a number of wings secured to a rotating shaft that is driven by a motor, where the inner wall of the cylinder includes radially inwards directed projections for forming a turbulent flow of fibres and air, where the

front edges of the wings are compressing the fibres by close contact with the projections of the cylinder, where the compressed fibres form fibre balls by repeated contact with the rotating wings and the inner wall of the cylinder.

- 5 By the method may thus be achieved that a fibre material is rapidly and in a simple way transformed into fibre balls by a continuous process.

10 In the following, the invention is explained from Fig. 1 that shows a possible embodiment of an apparatus 2 for making fibre balls. The apparatus 2 includes an inlet 4 and an outlet 6. A cylindric housing 8 includes a rotating shaft 10 driven by a not shown motor. A number of wings 12 are symmetrically secured to the rotating shaft 10. The cylindric housing 8 has an inner wall 14 including projections 16 that interact with wing front edges 18. The projections 16 are designed with teeth 20 interacting with the wing front edges 18 that are designed with teeth 22.

15 Fibres, in the shape of loose fibres or crudely cut blocks of fibres, are supplied to the machine inlet 4. The machine sucks the fibres onwards to contact with the first set of wings 12 that divide the fibre blocks into lesser lumps. Fibres passing between wing front edges 18 and projections 16 are compressed and jerked loose from the teeth 20, 22 found on both projections 16 and wing front edges 18. At the continued passage of the rotating wings 12, compression and jerking loose of the fibre balls are repeated. The rotating wings 12 induce a rotating as well as advancing air flow in the cylindric housing. The air flow moves the fibres, and the rotating movement of the air will produce rotation of loose fibres and entirely or semi-finished fibre balls. Centrifugal forces will deflect fibres and fibre balls outwards against the inner wall 14 of the cylinder, where the projections 16 are forming turbulence. The turbulent movement of the fibre balls contributes to their shaping. By combination of contact between still and rotating teeth and the turbulent movement is achieved a very rapid and efficient formation of fibre balls.

Claims

1. Apparatus for making fibre balls from a fibrous product, where the apparatus (2) includes an inlet (4) for fibrous products and an outlet (6) for fibrous balls, where the apparatus (2) includes a cylindric housing (8), where the apparatus (2) includes a centrally disposed, through-going rotating shaft (10) that is driven by a motor, where a number of radially outwards directed wings (12) are secured to the shaft (10) and are interacting with the internal wall (14) of the cylindric housing (8), where the cylindric housing (8) on the inner wall (14) includes at least one axially extending projection (16), where the projection (16) of the inner wall interacts with the front edge (18) of the outwards projecting wings (12), where the axially extending projection (16) is designed with radially and inwards directed teeth (20), and where the front edges (18) of the outwards directed wings (12) are designed with radially outwards directed teeth (22), **characterised in that** at least one of the radially outwards directed wings (12) is angularly displaced relative to the longitudinal axis of the wing (12) for achieving an air flow through the apparatus.
2. Apparatus according to claim 1, **characterised in that** the front edge (18) of the outwards directed wings (12) are angularly displaced relative to the longitudinal axis of the wing (12), whereby the radially and outwards directed teeth (22) interact with a plurality of the radially, inwards directed teeth (20) of the projections (16).
3. Apparatus according to any of claims 1 - 2, **characterised in that** the outwards directed wings (12) are angularly displaced relative to the longitudinal axis of the wing (12) with different angles.
4. Apparatus according to any of claims 1 - 3, **characterised in that** the inner wall (14) of the cylindric housing (8) includes a number of axially extending projections (16) that are provided with angular intervals on the cylindric inner wall (14).
5. Method for making fibre balls from a fibrous product in a machine that include a cylinder containing a number of wings secured to a rotating shaft that is driven by a motor, where the inner wall of the cylinder includes radially inwards directed projec-

tions for forming a turbulent flow of fibres and air, where the front edges of the wings are compressing the fibres by close contact with the projections of the cylinder, where the compressed fibres form fibre balls by repeated contact with the rotating wings and the inner wall of the cylinder.

ABSTRACT

The present invention concerns an apparatus and a method for making fibre balls from a fibrous product, where the apparatus includes an inlet for fibrous products and an outlet for fibrous balls, where the apparatus includes a cylindric housing, where the apparatus includes a centrally disposed, through-going rotating shaft that is driven by a motor, where a number of radially outwards directed wings are secured to the shaft and are interacting with the internal wall of the cylindric housing. The purpose of the invention is to provide a simple and rapidly continually working machine for producing fibre balls from a fibrous product. This may be achieved with a machine as described in the introduction, if the cylindric housing at the inner wall includes at least one axially extending projection, where the projection of the inner wall interacts with the front edge of the outwards directed wings. Hereby may be achieved that fibre balls are formed in a very efficient way. Fibre products may continually be supplied to the inlet, and finished fibre balls may continually be delivered from the outlet of the machine. The machine is not critical with regard to the form of fibrous products with which it is supplied. Loose fibres may be used, but plates or lumps of cohering fibres may be supplied as the machine automatically performs a dividing.

1/1

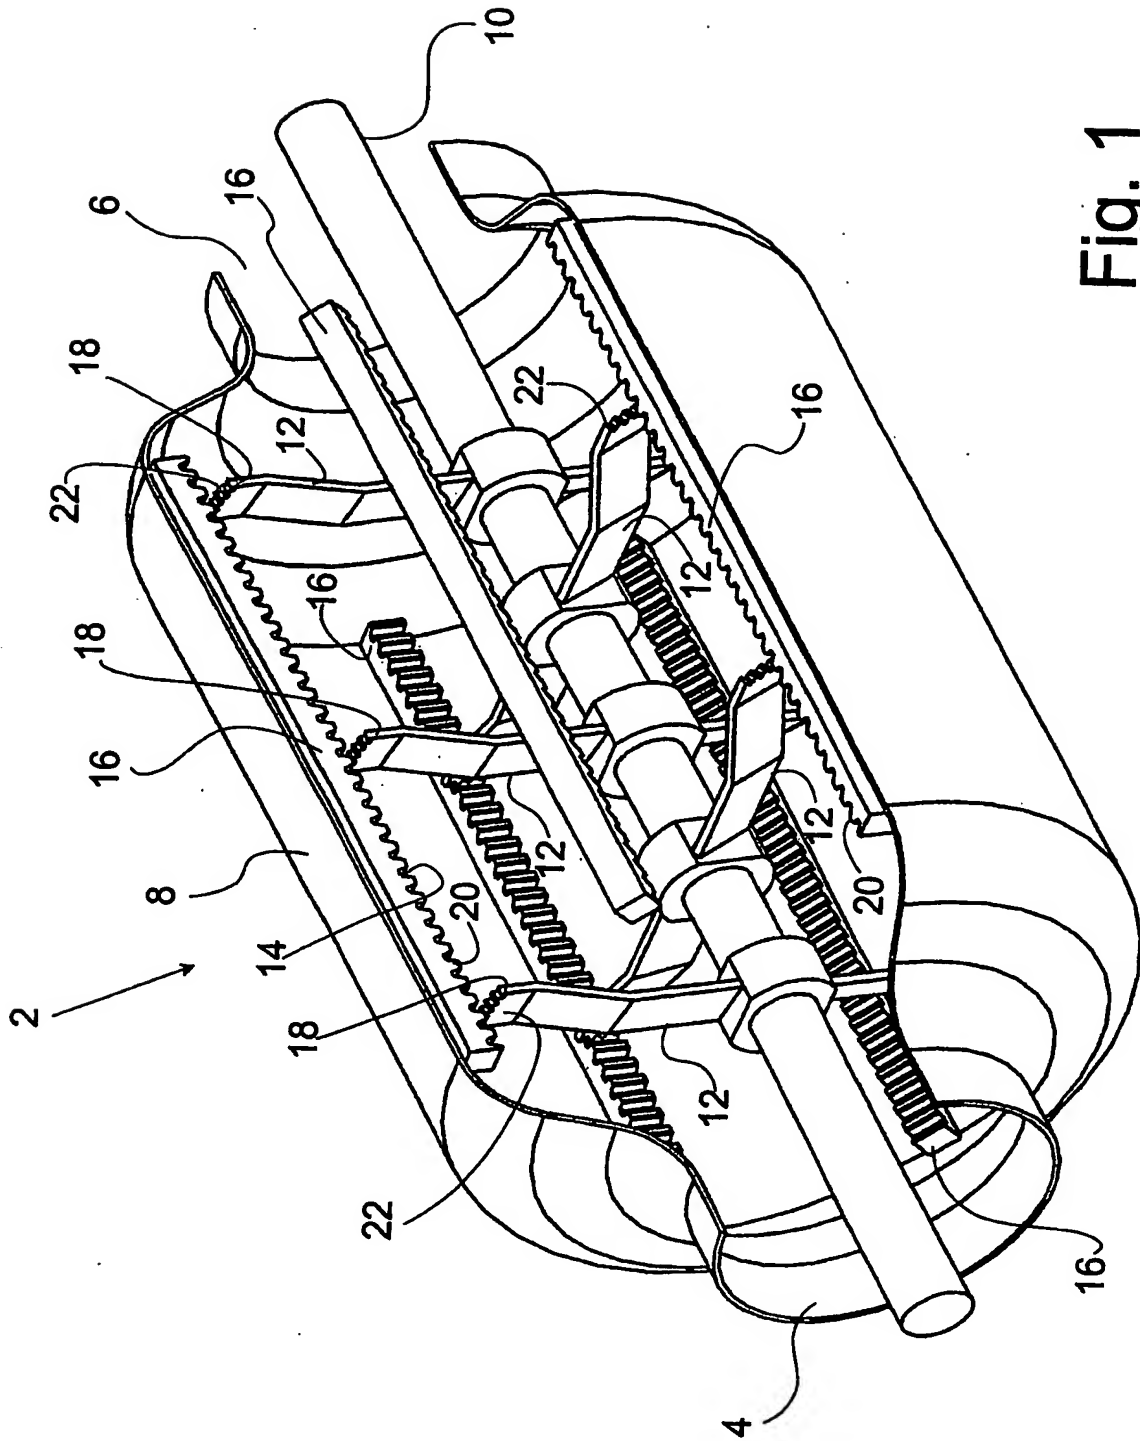


Fig. 1

INTERNATIONAL SEARCH REPORT

Rec'd PCT/PRO 28 FEB 2005

Application No

PCT/DK 03/00566

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D04H1/00 B01J2/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D04H B26D B01F A47G B29B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| Y | US 4 144 294 A (WERTHAISER MARTIN S ET AL) 13 March 1979 (1979-03-13) column 5, line 36 - column 6, line 2 --- | 1,2,4,5 |
| Y | US 6 406 287 B1 (VESA JUHA ET AL) 18 June 2002 (2002-06-18) column 2, line 56 - line 60; figure 3C --- | 1,2,4,5 |
| A | US 3 645 813 A (PELIKAN HANS DIETER ET AL) 29 February 1972 (1972-02-29) column 1, line 38 - line 41 column 2, line 45 - line 47 column 6, line 15 - line 22 --- | 1-5 |
| A | US 4 783 364 A (ILAN MARCUS) 8 November 1988 (1988-11-08) the whole document --- -/- | 1-5 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 January 2004

Date of mailing of the international search report

13 FEB 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

WILLIAM HELIN/JAA

INTERNATIONAL SEARCH REPORT

Application No
PCT/DK 03/00566

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| A | US 5 429 783 A (KIRKBRIDE JAMES F) 4 July 1995 (1995-07-04) the whole document ----- | 1-5 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

natl

Application No

PCT/DK 03/00566

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|----|---------------------|--|--|
| US 4144294 | A | 13-03-1979 | NONE | |
| US 6406287 | B1 | 18-06-2002 | FI 980053 A AU 1970499 A BR 9906960 A CA 2317466 A1 CN 1288494 T EE 200000409 A EP 1047820 A1 WO 9936609 A1 | 15-07-1999 02-08-1999 14-11-2000 22-07-1999 21-03-2001 17-12-2001 02-11-2000 22-07-1999 |
| US 3645813 | A | 29-02-1972 | DE 1728102 B1 AT 295987 B BE 737842 A CH 512596 A DK 136411 B FI 54879 B FR 2016338 A5 GB 1276913 A LU 59289 A1 NL 6911173 A ,B SE 384697 B | 18-02-1971 25-01-1972 02-02-1970 15-09-1971 10-10-1977 29-12-1978 08-05-1970 07-06-1972 01-01-1970 26-02-1970 17-05-1976 |
| US 4783364 | A | 08-11-1988 | US 4618531 A AT 84496 T AU 581758 B2 AU 5744686 A CA 1250415 A1 DE 3687477 D1 DE 3687477 T2 DE 203469 T1 DK 223386 A EP 0203469 A1 ES 8708255 A1 FI 862016 A ,B, IE 59874 B1 IN 168835 A1 JP 1717407 C JP 3079465 B JP 62033856 A KR 8802443 B1 NO 861918 A ,B, PT 82582 A ,B US 5344707 A US 5338500 A US 5500295 A US 4940502 A US 5112684 A US 5169580 A US 5238612 A US 4794038 A US 5294392 A | 21-10-1986 15-01-1993 02-03-1989 20-11-1986 28-02-1989 25-02-1993 29-04-1993 09-04-1987 16-11-1986 03-12-1986 16-12-1987 16-11-1986 20-04-1994 22-06-1991 14-12-1992 18-12-1991 13-02-1987 12-11-1988 17-11-1986 17-06-1987 06-09-1994 16-08-1994 19-03-1996 10-07-1990 12-05-1992 08-12-1992 24-08-1993 27-12-1988 15-03-1994 |
| US 5429783 | A | 04-07-1995 | AU 2381095 A CN 1146220 A ,B DE 69501260 D1 DE 69501260 T2 EP 0757727 A1 | 10-11-1995 26-03-1997 29-01-1998 18-06-1998 12-02-1997 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

Application No
PCT/DK 03/00566

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| US 5429783 | A | ES 2112061 T3 | 16-03-1998 |
| | | JP 9512065 T | 02-12-1997 |
| | | KR 215683 B1 | 16-08-1999 |
| | | WO 9528513 A2 | 26-10-1995 |
| ----- | | | |